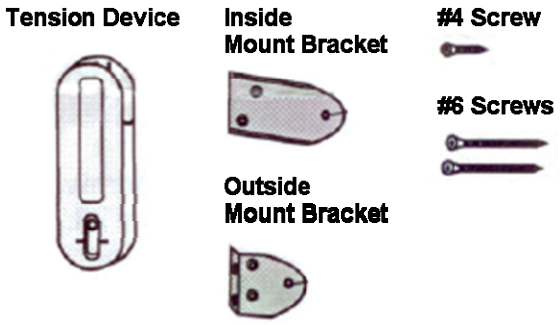
Instructions for Installing Tension Device for Cord/Bead Chain Loop

BLYNCO WINDOW FASHIONS

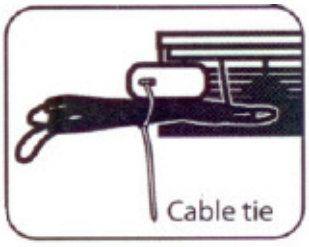
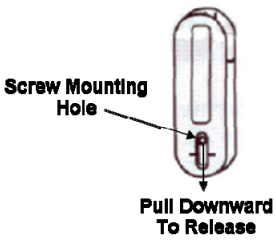


⚠ WARNING

It is imperative that the drive tension device for cord and bead chain loops be properly secured to the wall or window frame to reduce a child's access to the cord and bead chain loop. Young children can STRANGLE in cord and bead chain loops. They can also wrap cords around their necks and STRANGLE. Always keep cords and bead chains out of children's reach. Move cribs, playpens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords. Attaching the tension device to the wall or floor can prevent children from pulling cords and bead chains around their necks. If you are a professional installer or not the end user of this product, please make the end consumer aware of the safety warnings and pass along all safety information to them.

Parts Listing	
Tension Device-attached to shade (1) Inside Mount Bracket (1) Outside Mount Bracket (1) #4 Screw (1) #6 Screw (2)	

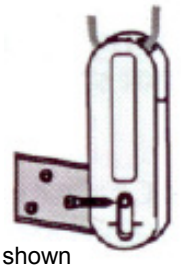
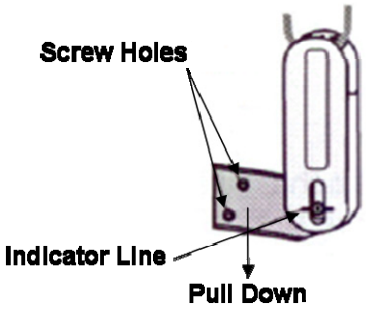
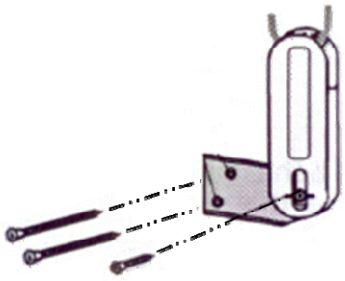
In accordance with WCMA and ANSI standards, this window covering product has been packaged and shipped to prevent the window covering from operating until it has been altered from it's shipped condition and been properly installed.

Tension Device Installation	
1 At time of installation, using caution not to cut or damage the cord/chain loop, use cutting pliers to carefully snip and remove the cable tie that is securing the operating chain/cord and tension device.	
2 Unlock the tension device from the chain/cord by pulling the screw mounting hole toward the bottom of the device and slide the tension device to the bottom of the fully extended cord/bead chain loop. When you release the mounting screw hole, the lock will re-engage.	

63-0307-00 Rev 10-17-15

Instructions for Installing
Tension Device for Cord/Bead Chain Loop

BLYNCO WINDOW FASHIONS

Tension Device Installation (Continued)	
3 Select the Inside Mount or Outside Mount tension device mounting bracket as required for your particular installation and attach the device to the mount bracket by placing the nub on the mounting bracket into the back of the screw hole on the tension device and installing the #4 screw through the front screw hole on the tension device.	 *Inside mount bracket shown
4 Pull down on the bracket and align the center of the mounting bracket screw with the indicator line on the device. While holding the device firmly in place, check if the loop and any connecting beads can move freely through the tension device without interfering with the lock. Adjust the mounting height of the bracket as necessary. Mark and pre-drill the holes to secure the mounting bracket to the wall or window sill.	 *Inside mount bracket shown
5 Detach the device from the bracket by removing the #4 screw. Align the bracket screw holes with the pre-drilled holes and mount the bracket to the wall or sill with the two #6 screws. Re-attach the tension device to the bracket with the #4 screw.	 *Inside mount bracket shown
6 Operate the window covering to ensure the loop and any connecting beads can move freely through the device without interference with the lock.	

Note: Bead chain connectors and stops will cause a slight jump when passing through the tension device.

63-0307-00 Rev 10-17-15